

15° Wire Coil for Framing Nailers

Find the Perfect NailScrew® for you

Tools: UFO NailScrew Driver™; Amigo Brand Rollo; Senco SCN60 & SCN65; Hitachi NV83A2; Bostitch N70 & N80; Max CN70 & CN80; Makita AN621; Paslode F325C, and other wire coil framing nailers.


Yellow Zinc Coated for Interior Use: Subfloor, EWP, Pallet & Crating, etc.

Part Number	Length	Dia.	Head	Collation	Coating	M/Case	Case / Skid
WCNS214113YZSQ	2-1/4"	0.113	#2 SQ	Wire Coil	YZ	3.6	56
WCNS214113YZPH	2-1/4"	0.113	#2 PH	Wire Coil	YZ	3.6	56
WCNS212113YZPH	2-1/2"	0.113	#2 PH	Wire Coil	YZ	3.6	56
WCNS212113YZSQ	2-1/2"	0.113	#2 SQ	Wire Coil	YZ	3.6	56
<small>NEW</small> WCNS300120YZSQ	3"	0.120	#2 SQ	Wire Coil	YZ	3.6	56

NailScrews® average 44% - 57% stronger and provide more pull-out resistance than ring shank nails in testing.

Intertek Test Report # 3100366-001 Averages

Patent Pending

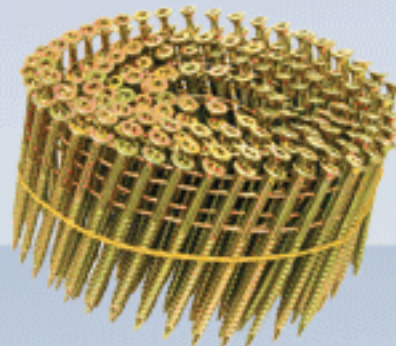

Size	Shear	Bend Yield	Pull-Out Resistance
2-1/4 x .113	1,218 lbs	103 lbf	477 lbf
2-1/2 x .113	1,329 lbs	111 lbf	492 lbf
<i>VS Ring Shank Nails:</i>			
2-3/8 x .113	843 lbs	72 lbf	442 lbf

PT2000® Alloy Coating for use in all Treated Lumber Decking including ACQ


Part Number	Length	Dia.	Head	Collation	Coating	M/Case	Case / Skid
PTWCNS200113SQ	2"	0.113	#2 SQ	Wire Coil	PT2000®	0.8	100
PTWCNS212113SQ	2-1/2"	0.113	#2 SQ	Wire Coil	PT2000®	0.8	100
PTWCNS300113SQ	3"	0.113	#2 SQ	Wire Coil	PT2000®	0.8	100

PT2000® Coated Engineered for Trex® Composite Decking

Part Number	Length	Dia.	Head	Collation	Coating	M/Case	Case / Skid
PTWCNS214CSQ	2-1/4"	0.120	#2 SQ	Wire Coil	PT2000®	0.8	100

Engineered for
Trex®

PT2000® with
Vinyl Coating

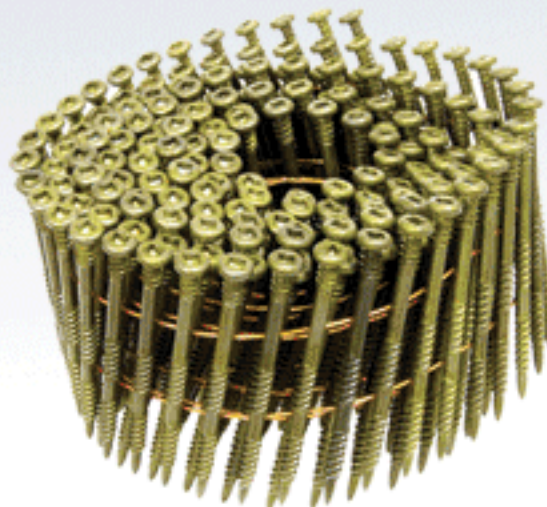

**Increase Productivity 40%
over collated screws and
70% over hand drive screws.**

**316 & 305 Stainless Steel
NailScrews® Coming
Spring 2008!**

New and Improved
PT2000® Color

